
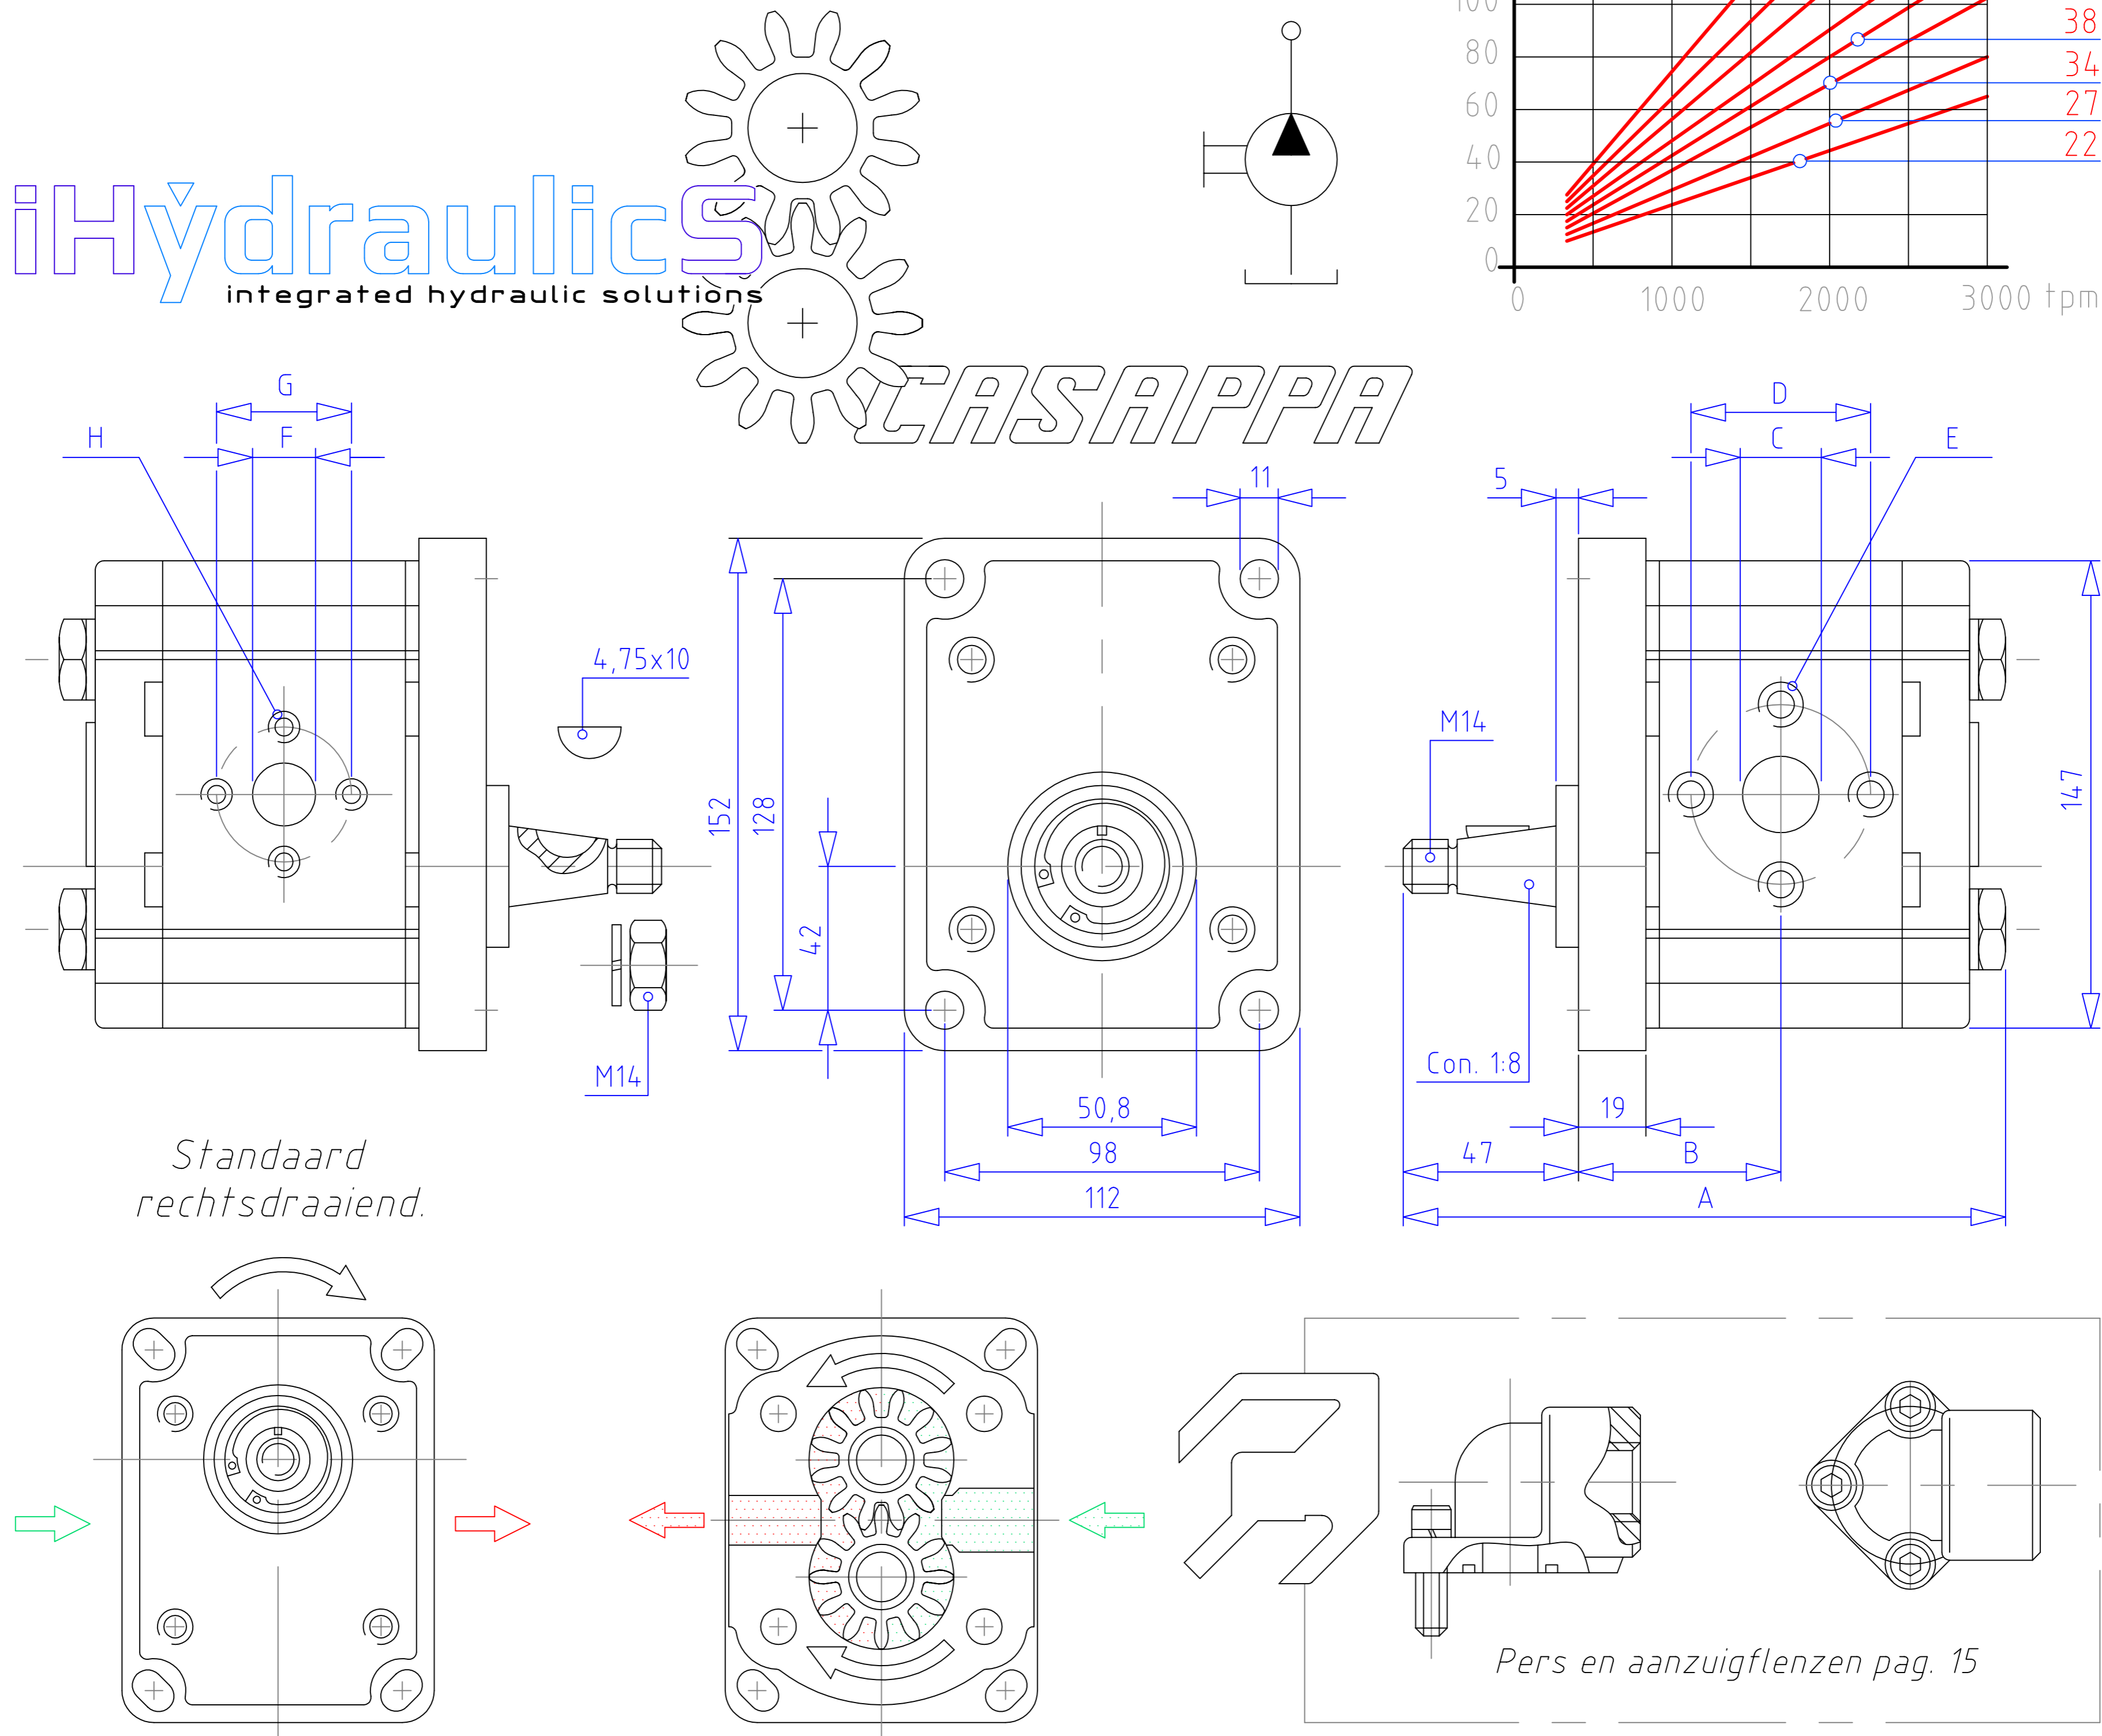


Technische gegevens: POLARIS 30

Maximum druk intermitterend 270 Bar.
Maximum piekdruk 280 Bar.

Omkeren van de draairichting mogelijk.
Aluminium huis voor en achterdeksel verstevigd.

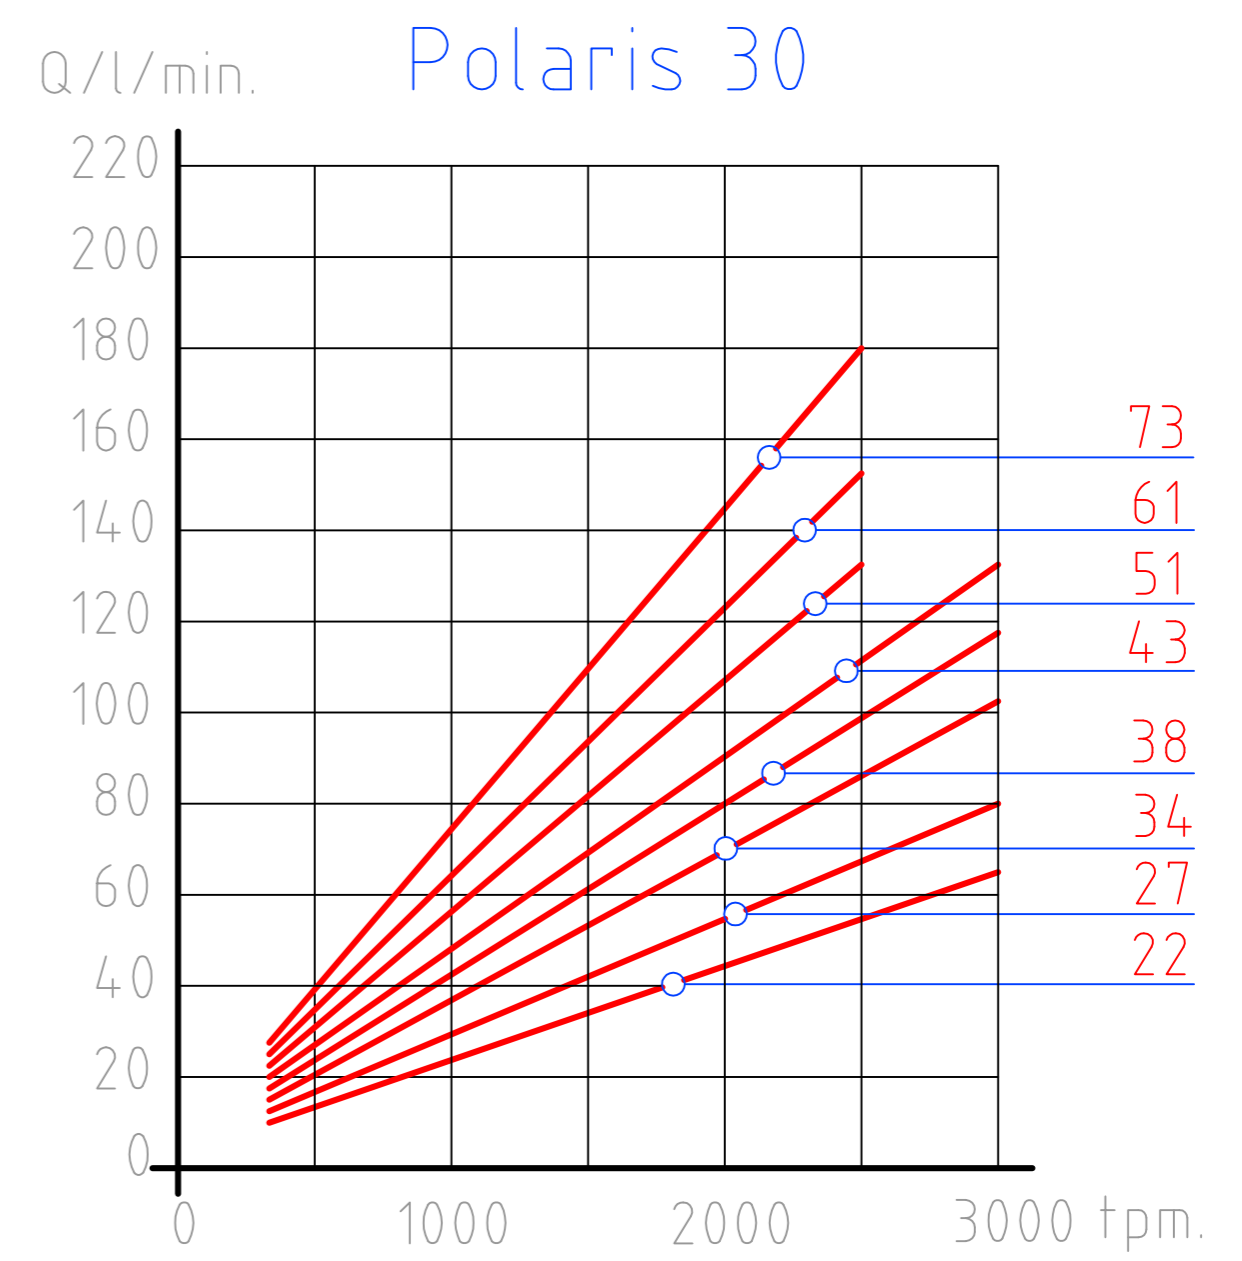

Artikelnr:	cc/omw.	Min. tpm.	Max. tpm.	Werkdruk Bar.	Afmetingen in mm.							
					A	B	C	D	E	F	G	H
PLP30.22 D 083	21,99	350	3000	250	162	58	27	51	M10	19	40	M8
PLP30.27 D 083	26,70	350	3000	250	165	59,5	27	51	M10	19	40	M8
PLP30.34 D 083	34,55	350	3000	240	170	62	27	51	M10	19	40	M8
PLP30.38 D 083	39,27	350	3000	240	173	63,5	27	51	M10	19	40	M8
PLP30.43 D 083	43,98	350	3000	230	176	65	27	51	M10	19	40	M8
PLP30.51 D 083	51,83	350	2500	210	181	67,5	27	51	M10	19	40	M8
PLP30.61 D 083	61,26	350	2500	190	187	70,5	27	51	M10	19	40	M8
PLP30.73 D 083	73,83	350	2500	170	195	74,5	33	62	M12	27	51	M10

Ook op aanvraag in andere, flens en aansluitmogelijkheden.